

Surface Mount Glass Passivated Standard Rectifier  
Reverse Voltage -50~1000 V  
Forward Current - 1.0A

### FEATURES

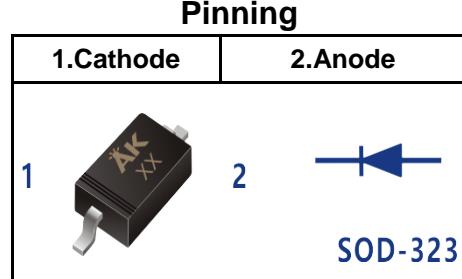
- ♦ Low Forward Voltage Drop
- ♦ Guard Ring Construction for Transient Protection
- ♦ Negligible Reverse Recovery Time
- ♦ Low Capacitance
- ♦ Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- ♦ Case: SOD-323
- ♦ Terminals: Solderable per MIL-STD-750, Method 2026
- ♦ Approx. Weight: 5.48mg / 0.00019oz



**RoHS**  
COMPLIANT  
**HALOGEN FREE**



Marking Code	
1N4001WS	1A
1N4002WS	2A
1N4003WS	3A
1N4004WS	4A
1N4005WS	5A
1N4006WS	6A
1N4007WS	7A

### Maximum Ratings and Electrical characteristics






Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	1N4001 WS	1N4002 WS	1N4003 WS	1N4004 WS	1N4005 WS	1N4006 WS	1N4007 WS	Units
Peak Repetitive Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
RMS reverse voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Working Peak Reverse Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$				1				A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load	$I_{FSM}$				15				A
Maximum Instantaneous Forward Voltage 1A	$V_F$				1.1				V
Maximum DC Reverse Current Ta=25 °C at Rated DC Blocking Voltage Ta=125 °C	$I_R$				5	50			uA
Typical Thermal Resistance <sup>(1)</sup>	$R_{θJA}$				55				°C/W
Typical reverse recovery time <sup>(2)</sup>	$T_{rr}$				1.8				uS
Typical junction capacitance <sup>(3)</sup>	$C_J$				5				pF
Operating and Storage Temperature Range	$T_j, T_{stg}$				-55 ~ +150				°C

<sup>(1)</sup> P.C.B. mounted with 0.2" X 0.2" (5 X 5 mm) copper pad areas.

<sup>(2)</sup> Measured with IF=0.5A, IR =1A, Irr= 0.25A


<sup>(3)</sup> Measured at 1 MHz and applied reverse voltage of 4 V D.C

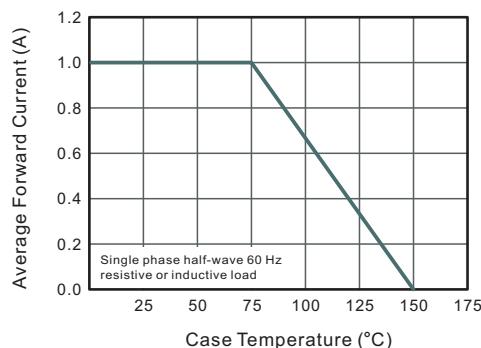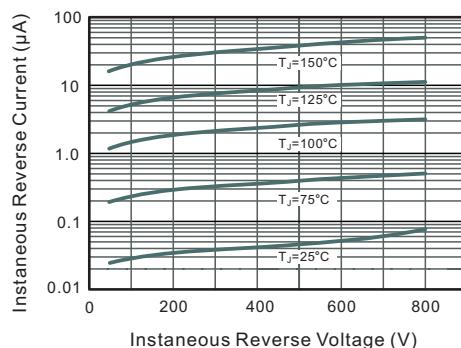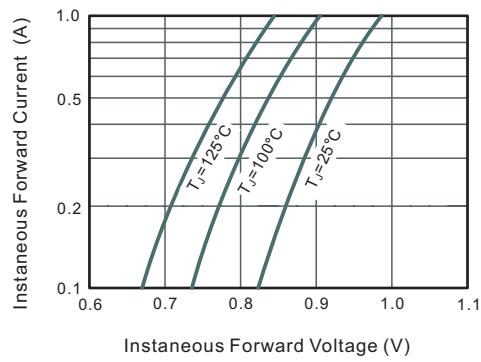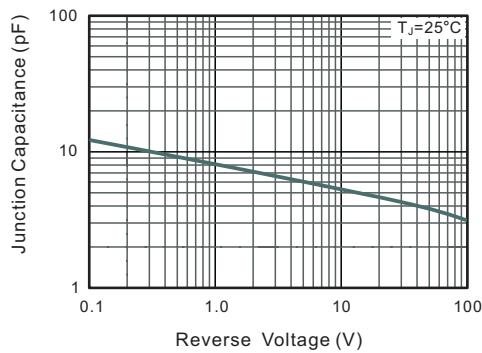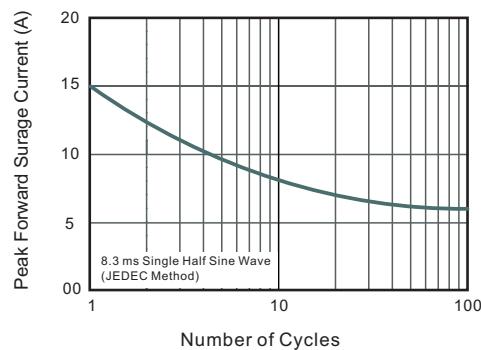**Fig.1 Forward Current Derating Curve****Fig.2 Typical Instantaneous Reverse Characteristics****Fig.3 Typical Forward Characteristic****Fig.4 Typical Junction Capacitance****Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

### Package Outline

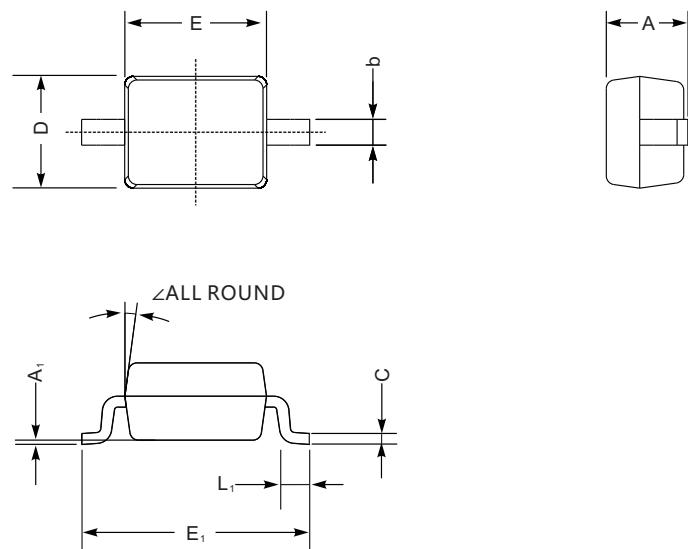
### SOD-323

Plastic surface mounted package; 2leads



UNIT		A	C	D	E	E <sub>1</sub>	b	L <sub>1</sub>	A <sub>1</sub>	∠
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	9°
	min	32	3.1	47	63	100	9.8	7.9	—	

### The recommended mounting pad size

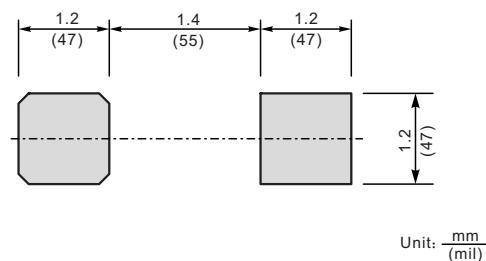

Unit:  $\frac{\text{mm}}{(\text{mil})}$

### Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOD-323	Tape/Reel, 7" reel	3000	EIA-481-1